

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : H01J 29/07	A1	(11) International Publication Number: WO 00/60638 (43) International Publication Date: 12 October 2000 (12.10.00)
(21) International Application Number: PCT/US00/08058 (22) International Filing Date: 27 March 2000 (27.03.00) (30) Priority Data: 09/283,508 1 April 1999 (01.04.99) US (71) Applicant (for all designated States except US): THOMSON LICENSING S.A. [FR/FR]; 46, quai Alphonse Le Gallo, F-92648 Boulogne Cedex (FR). (72) Inventor; and (75) Inventor/Applicant (for US only): GOROG, Istvan [US/US]; 1275 Wheatland Avenue, Lancaster, PA 17603 (US). (74) Agents: TRIPOLI, Joseph, S. et al.; Thomson Multimedia Licensing Inc., P.O. Box 5312, Princeton, NJ 08540 (US).		(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: COLOR PICTURE TUBE HAVING A LOWER EXPANSION TENSION MASK ATTACHED TO A HIGHER EXPANSION FRAME <div data-bbox="483 1161 1130 1680" data-label="Image"> </div> (57) Abstract <p>A color picture tube (10) has a tensioned mask (24) supported by a support frame (50) mounted within the tube. The mask has a significantly lower coefficient of thermal expansion than the frame. The mask has an active apertured portion (40) formed by a plurality of parallel vertically extending strands (42), through which electron beams pass during operation of the tube, and two opposite side border portions (46, 48) outside the active apertured portion. The two opposite side border portions have tie bars (49) that extend between the vertical strands of the mask. The tie bars accommodate expansion of the frame, while substantially maintaining the positions of the vertical strands in the active portion of the mask.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	R	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 00/60638

PCT/US00/08058

1
COLOR PICTURE TUBE HAVING A LOWER EXPANSION TENSION MASK
ATTACHED TO A HIGHER EXPANSION FRAME

This invention relates to color picture tubes having tension masks, and particularly to a tube having means for connecting a tension mask, that is made of a material having a relatively low coefficient of thermal expansion material, to a support frame, that has a significantly higher coefficient of thermal expansion.

A color picture tube includes an electron gun for generating and directing three electron beams to the screen of the tube. The screen is located on the inner surface of a faceplate of the tube and is made up of an array of elements of three different color emitting phosphors. A color selection electrode, which may be either a shadow mask or a focus mask, is interposed between the gun and the screen to permit each electron beam to strike only the phosphor elements associated with that beam. A shadow mask is a thin sheet of metal, such as steel, that is usually contoured to somewhat parallel the inner surface of the tube faceplate.

One type of color picture tube has a tensioned shadow mask mounted within a faceplate panel thereof. In order to maintain the tension on the mask, the mask must be attached to a relatively massive support frame. Although such tubes have found wide consumer acceptance, there is still a need for further improvement in tube types to reduce the weight and cost of the mask-frame assemblies in such tubes.

It has been suggested that a lighter frame could be used in a tension mask tube if the required tension on a mask is reduced. One way to reduce the required mask tension is to make the mask from a material having a low coefficient of thermal expansion. However, a mask from such material would require a support frame of a material having a similar coefficient of thermal expansion to prevent any mismatch of expansions during thermal processing that is required for tube manufacturing, and during tube operation. Because the metal materials that have low coefficients of thermal expansion are relatively expensive, it is relatively costly to make both the mask and frame out of identical or similar materials. Therefore, it is desirable to use the combination of a lower expansion tension mask with a higher expansion support frame. The present invention provides a solution to the problem that exists when there is a substantial mismatch in coefficients of thermal expansion between a tension mask and its support frame.

The present invention provides an improvement in a color picture tube having a tension mask supported by a support frame mounted within the tube. The tension mask has a significantly lower coefficient of thermal expansion than that of the frame. The mask includes an active apertured portion formed by a plurality of parallel vertically extending strands, between which are elongated apertures through which electron beams pass during operation of the tube. Two opposite side border portions, outside the active apertured portion, have tie bars that extend between the vertical strands of the mask. The tie bars

WO 00/60638

PCT/US00/08058

2

accommodate expansion of the frame, while substantially maintaining the positions of the vertical strands in the active portion of the mask.

In the drawings:

FIGURE 1 is a side view, partly in axial section, of a color picture tube embodying
5 the invention.

FIGURE 2 is a front view of a tension shadow mask.

FIGURE 3 is a front view of a small section of a border portion of the mask of
FIGURE 2.

FIGURE 4 is a perspective view of a corner of a tension shadow mask-frame
10 assembly.

FIGURES 5 through 11 are front views of small sections of six different alternative
embodiments of tension mask border portions.

FIGURE 1 shows a color picture tube 10 having a glass envelope 11 comprising a
rectangular faceplate panel 12 and a tubular neck 14 connected by a rectangular funnel 15.
15 The funnel 15 has an internal conductive coating (not shown) that extends from an anode
button 16 to the wide portion of the funnel and to the neck 14. The panel 12 comprises a
substantially flat external viewing faceplate 18 and a peripheral flange or sidewall 20, which
is sealed to the funnel 15 by a glass frit 17. A three-color phosphor screen 22 is carried by
the inner surface of the faceplate 18. The screen 22 is a line screen with the phosphor lines
20 arranged in triads, each triad including a phosphor line of each of the three colors. A color
selection tension shadow mask 24 is removably mounted in predetermined spaced relation to
the screen 22. An electron gun 26, shown schematically by dashed lines in FIGURE 1, is
centrally mounted within the neck 14 to generate and direct three inline electron beams, a
center beam and two side beams, along convergent paths through the mask 24 to the screen
25 22.

The tube 10 is designed to be used with an external magnetic deflection yoke, such as
the yoke 30 shown in the neighborhood of the funnel-to-neck junction. When activated, the
yoke 30 subjects the three beams to magnetic fields which cause the beams to scan
horizontally and vertically in a rectangular raster over the screen 22.

30 The tension shadow mask 24, shown in FIGURES 2 and 3, includes two long sides 32
and 34, and two short sides 36 and 38. The two long sides 32 and 34 of the mask parallel a
central major axis, X, of the mask; and the two short sides 36 and 38 parallel a central minor
axis, Y, of the mask. The tension shadow mask 24 includes an active apertured portion 40
that contains a plurality of parallel vertically extending strands 42. A multiplicity of
35 elongated apertures 44, between the strands 42, parallel the minor axis Y of the mask. The
electron beams pass through the apertures 44 in the active portion 40 during tube operation.
Each aperture 44 extends continuously from a border portion 46 at a long side 32 of the mask
to another border portion 48 at the opposite long side 34.

WO 00/60638

PCT/US00/08058

3

A frame 50, for use with the tension shadow mask 24 is partially shown in FIGURE 4. The frame 50 includes four sides: two long sides 52, substantially paralleling the major axis X of the tube, and two short sides 54, paralleling the minor axis Y of the tube. Each of the two long sides 52 includes a rigid section 56 and a compliant section 58 cantilevered from the rigid section. The rigid sections 56 are hollow tubes, and the compliant sections 58 are metal plates. Each of the short sides 54 has an L-shaped cross-section upper portion 60 parallel to and separated from a flat bar-shaped lower portion 62. The two long sides 32 and 34 of the tension mask 24 are welded to the distal ends of the compliant sections 58. Although the present invention is described in embodiments using the frame 50, it is to be understood that many other types of tension frames could also be used with the present invention.

The strands 42 are continued from the active portion 40 into the border portions 46 and 48, where they are connected by tie bars 49, which interrupt the continuation of the apertures 44, as shown in FIGURES 3 through 10. The tie bars 49 in adjacent columns are vertically offset from each other, so that no two tie bars in adjacent columns have horizontally aligned centerlines. The strands 42 also extend beyond the border portions 46 and 48, where they are individually welded to the frame.

The purpose of the tie bars 49 in the border portions 46 and 48 of the mask 24 is two-fold. First, the tie bars 49 accommodate undesirable strand positioning errors that occur when individual strands are welded to the compliant section 58. Such individual strand attachment is required to avoid inelastic deformations that would be produced during thermal processing of mask-frame systems, wherein the mask and frame have considerably different coefficients of thermal expansion and the mask has a solid border in the weld zone, as is known in the art. When a low-thermal expansion mask with a solid border is affixed to a high-thermal expansion compliant section 58, thermal processing of the tube, which can reach temperatures as high as 450°C, can cause the mask to be inelastically stretched in the solid border region, and upon cool-down the mask wrinkles. In the absence of a solid border region, tie bars 49 assure that the desired strand spacing is maintained during welding.

The second purpose for the tie bars 49 is to accommodate the greater expansion of a high expansion frame 50 compared to that of a low expansion mask 24, without causing appreciable relocation of the mask strands 42 through permanent deformation of the mask border portion. The tie bars 49, together with the strand sections they interconnect, generally achieve this result by elastically stretching near the active portion of the mask. A key objective of all border treatments disclosed herein, wherein masks and frames are constructed of dissimilar materials, is to provide strand-to-strand spacing means when welding individual strands or small groups of strands, such that the mask can withstand the customary thermal processing of the tube without the formation of inelastic deformations that would result in errors in strand-to-strand openings.

WO 00/60638

PCT/US00/08058

4

Other embodiments of mask borders having different tie bar patterns are shown in FIGURES 5 through 11. In a mask 64, shown in FIGURE 5, tie bars are omitted near the compliant section 58. In a mask 66, shown in FIGURE 6, the tie bar positions are repeated every third column instead of every second column, as is done in the pattern of FIGURE 3.

5 FIGURE 7 shows a mask 68, wherein the spacing between tie bars is increased. FIGURE 8 shows a mask 70, wherein the repeat distance between tie bars is varied between adjacent columns. FIGURE 9 shows a mask 72, wherein a large tie bar is inserted in every other column. FIGURE 10 shows a mask 74, wherein every fourth column includes a large tie bar and the three intermediate columns do not have any tie bars near the compliant section 58.

10 FIGURE 11 shows a mask 76 having a border portion similar to that shown in the mask 24 of FIGURE 3, but an active portion 40 having widely spaced tie bars 78 connecting the strands therein. Alternatively, the vertical spacing between the tie bars 78 in the active portion 40 could be the same as the vertical spacing between tie bars in the border portion 46. Also possible are additional mask embodiments, which have border portions that include

15 tie bars. Preferably, the centerlines of tie bars in adjacent apertures are vertically offset.

In different embodiments, the vertical spacings between tie bars are in the range of 2.03 mm (80 mils) to as much as 76.96 mm (3030 mils). However, vertical spacings of tie bars of 2.54 mm (100 mils) to 4.06 mm (160 mils) are preferred. Generally, tie bar thickness of about 0.38 mm (15 mils) is preferred, although thicknesses of 1.02 mm (40 mils)

20 are used in some embodiments. Preferably, the mask is made from Invar material that is 0.10 mm (4.0 mils) thick, and the frame is made of AK steel.

All known commercially used tension shadow mask tubes have had solid border portions at the mask-to-frame weld points. This was acceptable when the mask and frame were made from similar expanding materials. However, when a mask and frame differ

25 greatly in coefficients of thermal expansion, such solid border portions will deform, thereby permanently deforming the active portion of the mask during thermal processing of the tube. Individual attachment of the mask strands to the frame, in combination with the novel border portion of the present invention, prevents substantial distortion in the active portion of the mask by providing a "mechanical filter" that accommodates any individual strand attachment

30 error or movement during processing or tube operation.

WO 00/60638

PCT/US00/08058

5
CLAIMS

1. A color picture tube (10) having a tension mask (24, 64, 66, 68, 70, 72, 74, 76) attached to a support frame (50) mounted within said tube, comprising
said mask having a significantly lower coefficient of thermal expansion than that of
5 said frame, and
said mask having an active apertured portion (40) formed by a plurality of parallel vertically extending strands (42), between which are elongated apertures (44) through which electron beams pass during operation of said tube, and two opposite side border portions (46, 48), outside said active apertured portion, having tie bars (49) extending between said
10 vertically extending strands.
2. The color picture tube (10) as defined in claim 1, wherein said strands (42) are separated at said frame (50) and individually welded thereto.
- 15 3. The color picture tube (10) as defined in claim 1 or 2, wherein centerlines of said tie bars (49) within adjacent apertures (44) are vertically staggered.
4. The color picture tube (10) as defined in claim 1 or 2, wherein said strands (42) have tie bars (78) therebetween in the active apertured portion (40) of said mask (76).
20
5. The color picture tube (10) as defined in claim 4, wherein the vertical spacing between the tie bars (78) in the active apertured portion (40) is greater than the vertical spacing between the tie bars (49) in the border portions (46, 48).
- 25 6. The color picture tube (10) as defined in claim 1 or 2, wherein said mask (24, 64, 66, 68, 70, 72, 74, 76) is made from Invar and said frame(50) is made from steel.

WO 00/60638

PCT/US00/08058




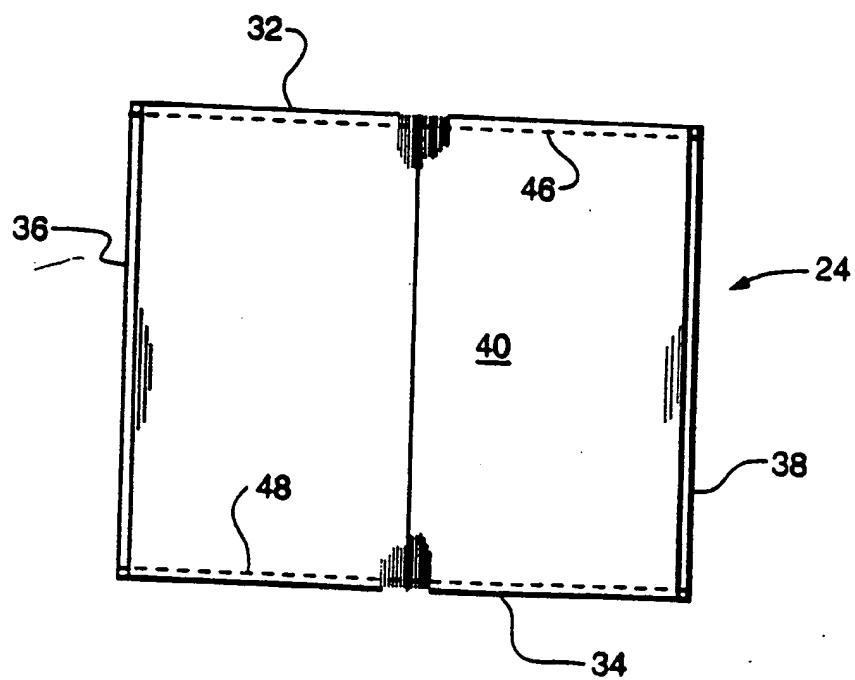


Fig. 2

WO 00/60638

PCT/US00/08058

2/6

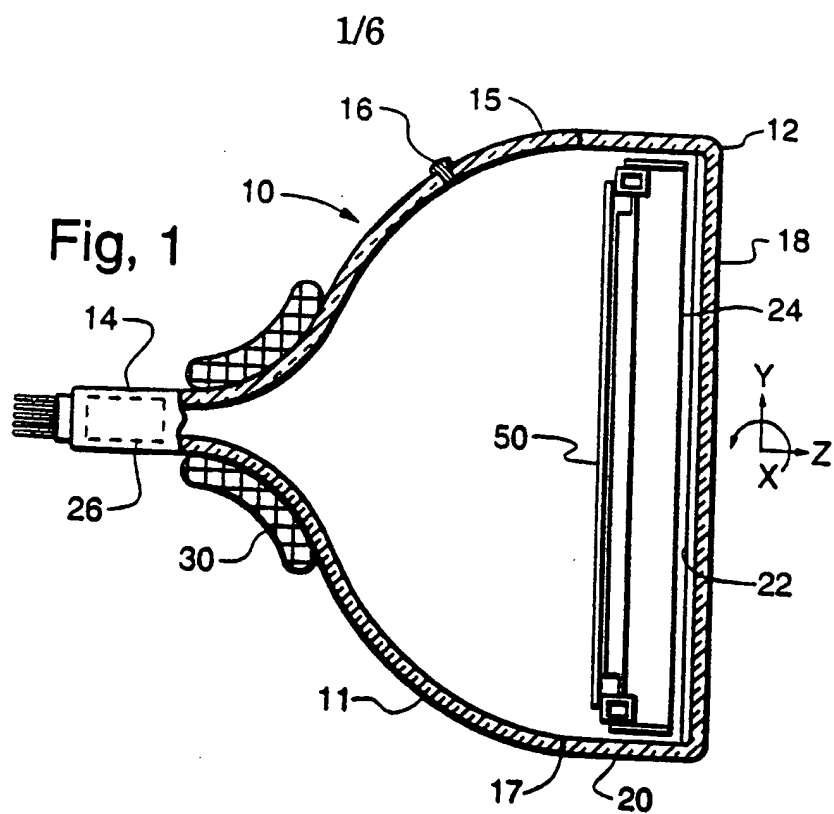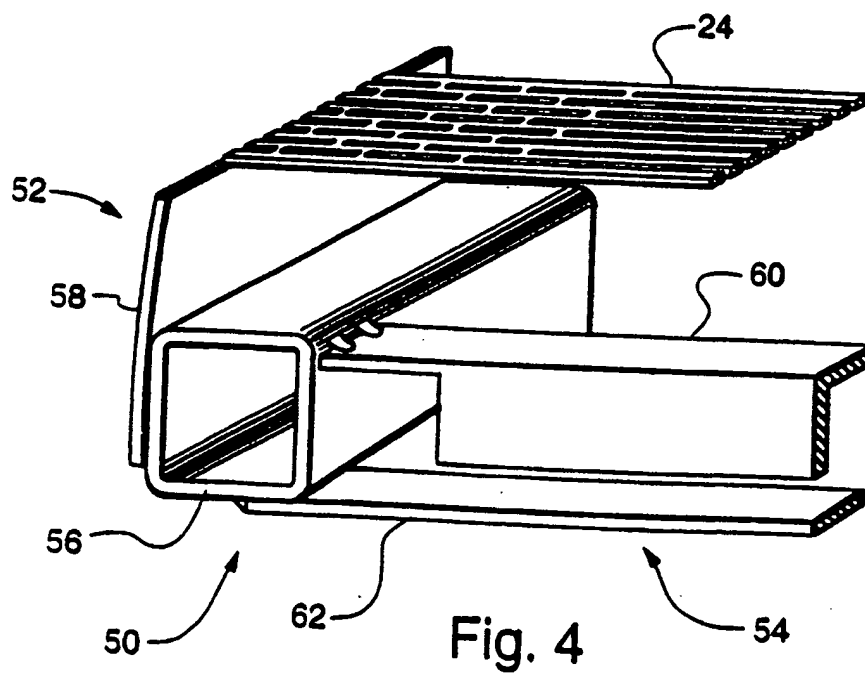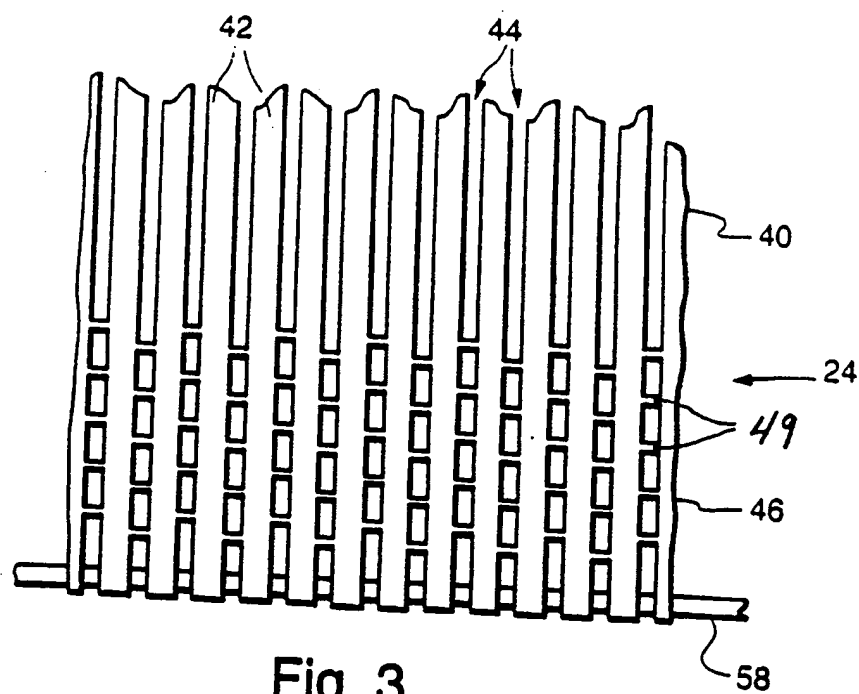

WO 00/60638

PCT/US00/08058

3/6

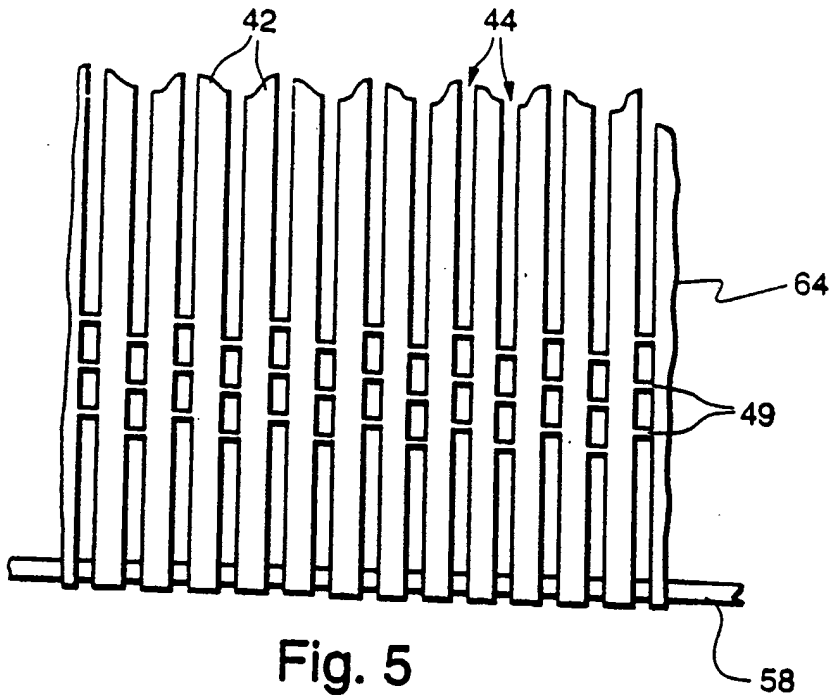


Fig. 5

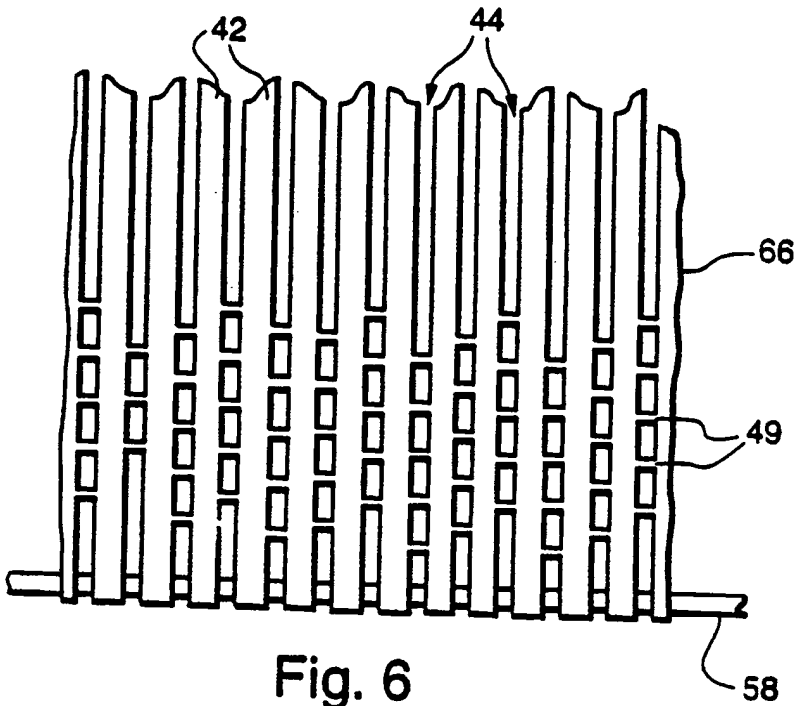


Fig. 6

WO 00/60638

PCT/US00/08058

4/6

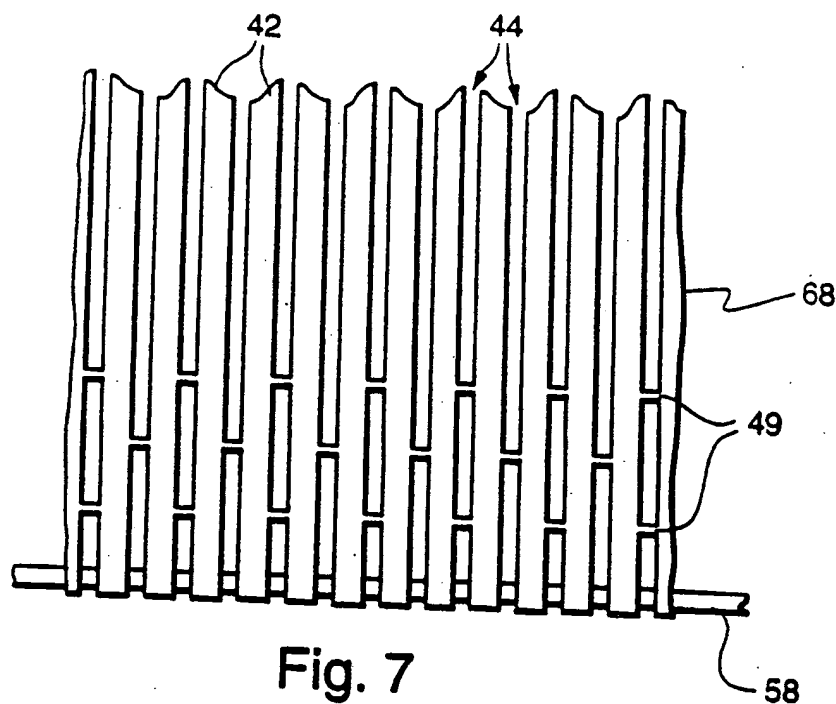


Fig. 7



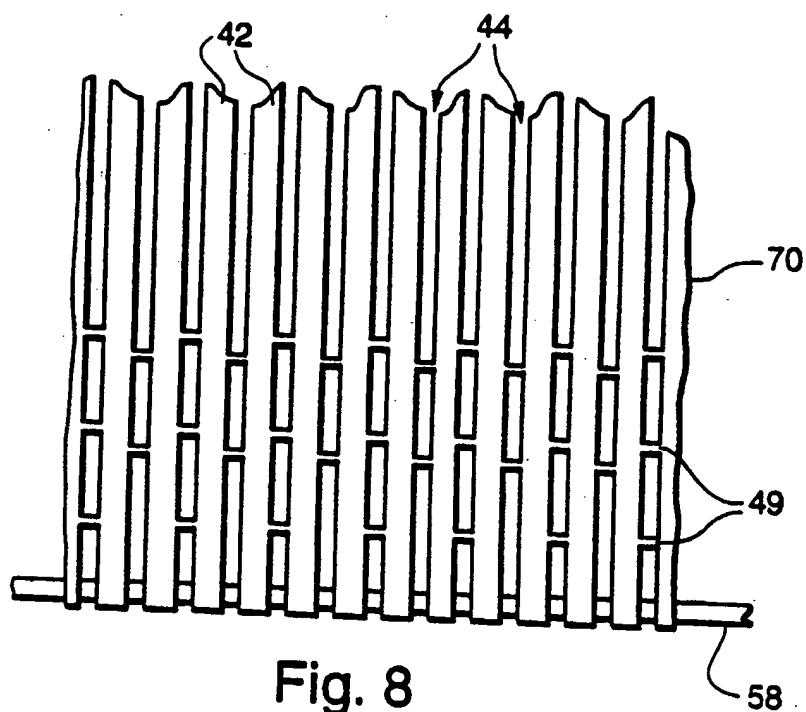


Fig. 8

WO 00/60638

PCT/US00/08058


5/6

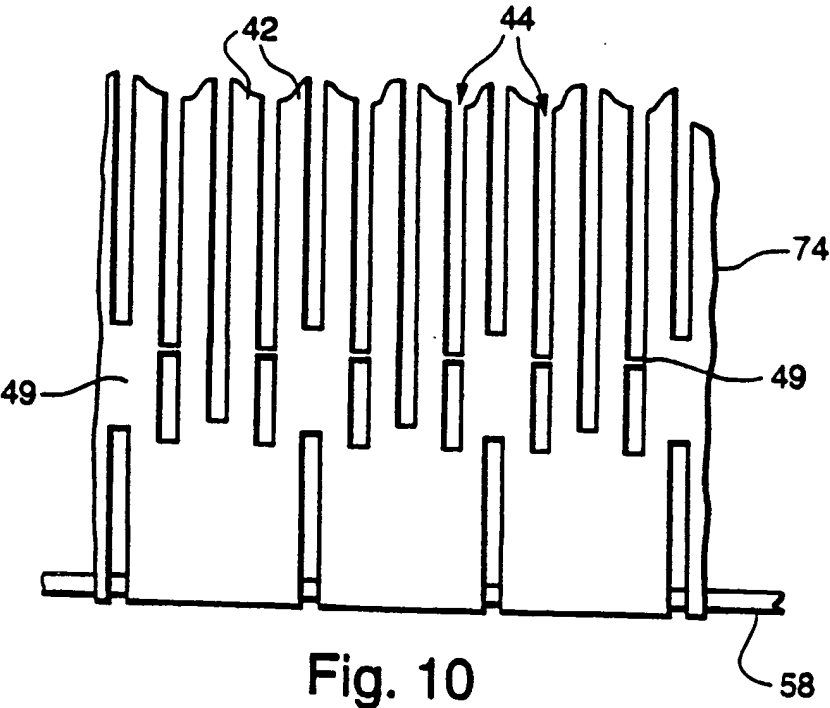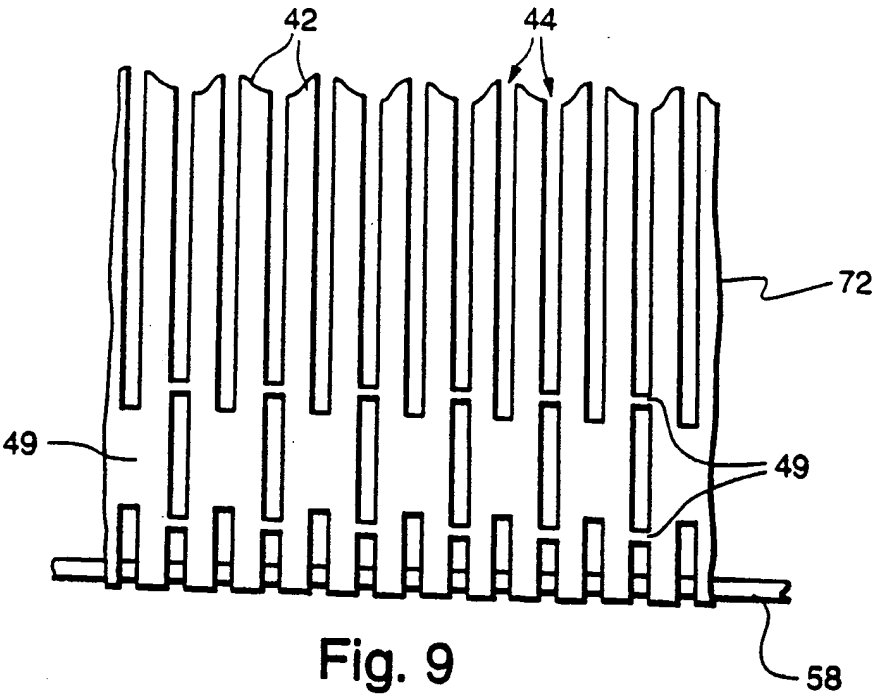

WO 00/60638

PCT/US00/08058

6/6

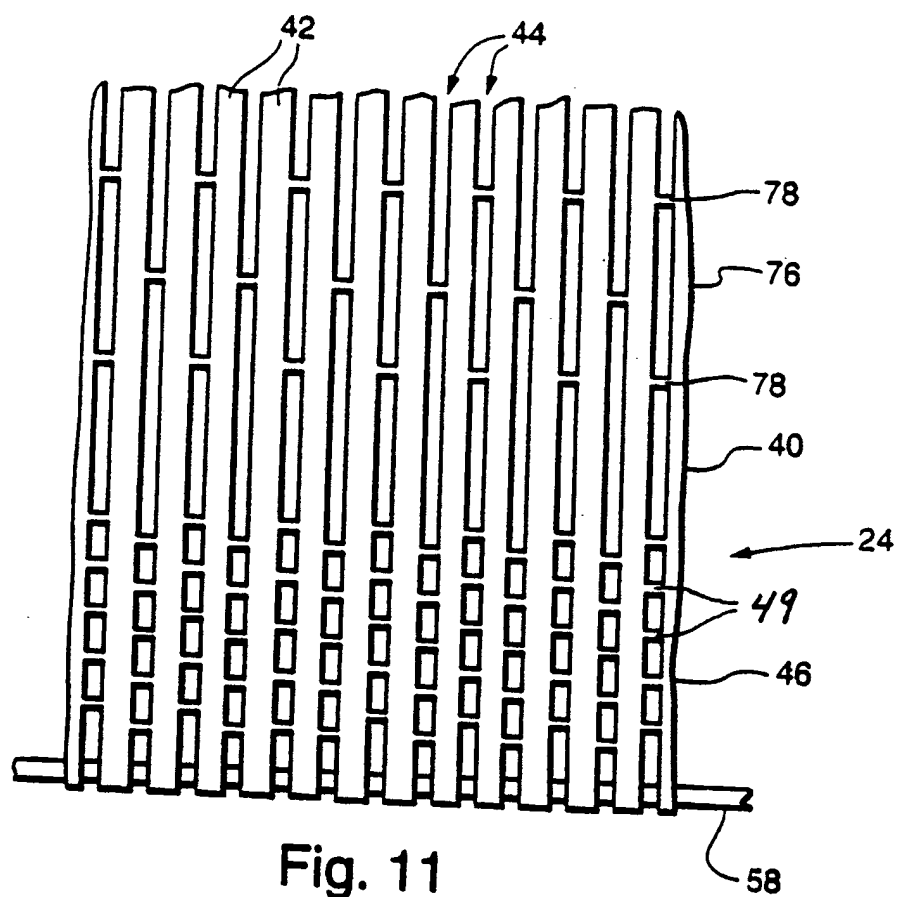

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/08058

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01J29/07

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 788 132 A (THOMSON CONSUMER ELECTRONICS) 6 August 1997 (1997-08-06) column 2, line 8 - line 17	1
A	EP 0 602 620 A (SONY CORP) 22 June 1994 (1994-06-22) column 1, line 15 - line 23 column 4, line 51 - line 55 column 5, line 9 - line 16 column 5, line 30 - line 42	1
A	US 5 488 263 A (TAKEMURA TAKETOSHI ET AL) 30 January 1996 (1996-01-30) column 1, line 45 - column 2, line 14 column 7, line 48 - column 8, line 67	1
-/--		

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

Date of the actual completion of the international search

3 July 2000

Date of mailing of the international search report

07/07/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Colvin, G

INTERNATIONAL SEARCH REPORT

Int. l. Application No

PCT/US 00/08058

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 009, no. 065 (E-304), 26 March 1985 (1985-03-26) & JP 59 203349 A (TOSHIBA KK), 17 November 1984 (1984-11-17) abstract	1
A	US 4 973 283 A (ADLER ROBERT ET AL) 27 November 1990 (1990-11-27) column 1, line 39 -column 2, line 15	4

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/08058

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0788132 A	06-08-1997	US 5680004 A	21-10-1997
		BR 9606168 A	18-08-1998
		CA 2192720 A	29-06-1997
		CN 1157997 A	27-08-1997
		JP 9237586 A	09-09-1997
		PL 317599 A	07-07-1997
		RU 2137244 C	10-09-1999
EP 0602620 A	22-06-1994	JP 6187918 A	08-07-1994
		DE 69305309 D	14-11-1996
		DE 69305309 T	28-05-1997
		US 5550428 A	27-08-1996
US 5488263 A	30-01-1996	JP 8264131 A	11-10-1996
JP 59203349 A	17-11-1984	NONE	
US 4973283 A	27-11-1990	US 4942332 A	17-07-1990